



Defaults Table

Preload: Preload	True
Test: Rate 1	0.49213 in/min


Method description

ASTM 3575-08 Test D Compressive Stress

Method Developed 2.4.2015 for BlueHill 3 software pack

Sample file name: Line 2 New Process 14mm.is_comp

Specimen 1 to 3

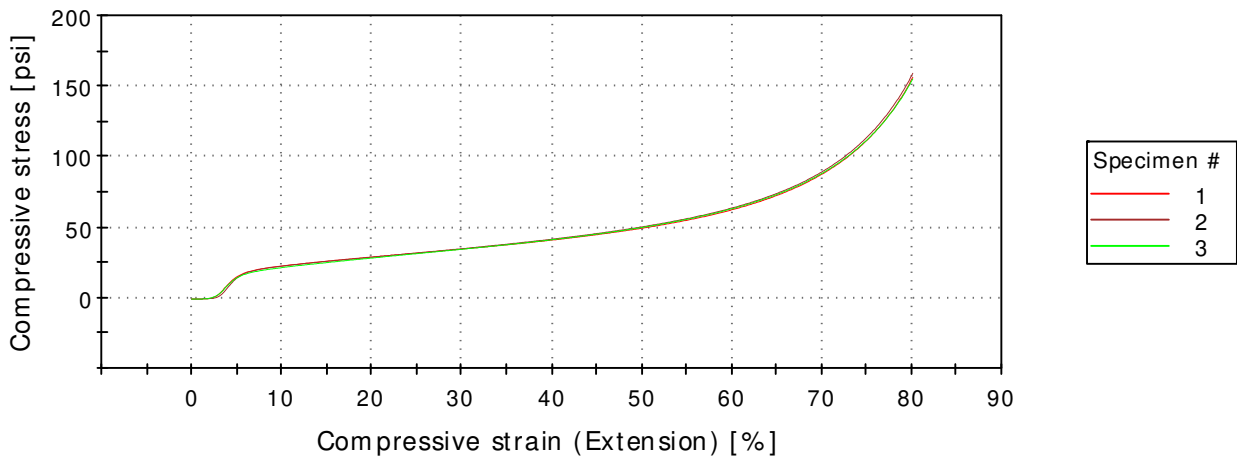

	Density (PCF)	Density (g/ l)	Deflection Force @ 25 % strain [psi]	Deflection Force @ 50 % strain [psi]	Deflection Force @ 75 % strain [psi]	Specimen Note
1	3.56955	57.23	32.25	49.84	112.63	Top
2	3.62153	58.06	32.36	50.80	114.74	Middle
3	3.56170	57.10	31.88	50.37	112.85	Bottom
Mean	3.58426	57.46	32.16	50.34	113.40	
Minimum	3.56170	57.10	31.88	49.84	112.63	



	Density (PCF)	Density (g/ l)	Deflection Force @ 25 % strain [psi]	Deflection Force @ 50 % strain [psi]	Deflection Force @ 75 % strain [psi]	Specimen Note
Maximum	3.62153	58.06	32.36	50.80	114.74	
Coefficient of variation	0.9	0.9	0.8	1.0	1.0	